

FIG. 1
(Prior Art)

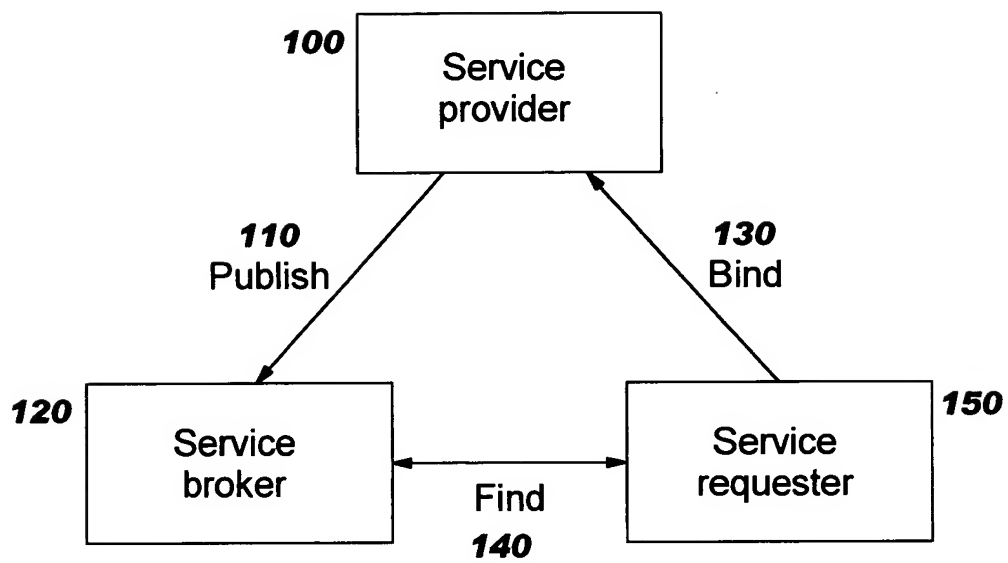


FIG. 2
200

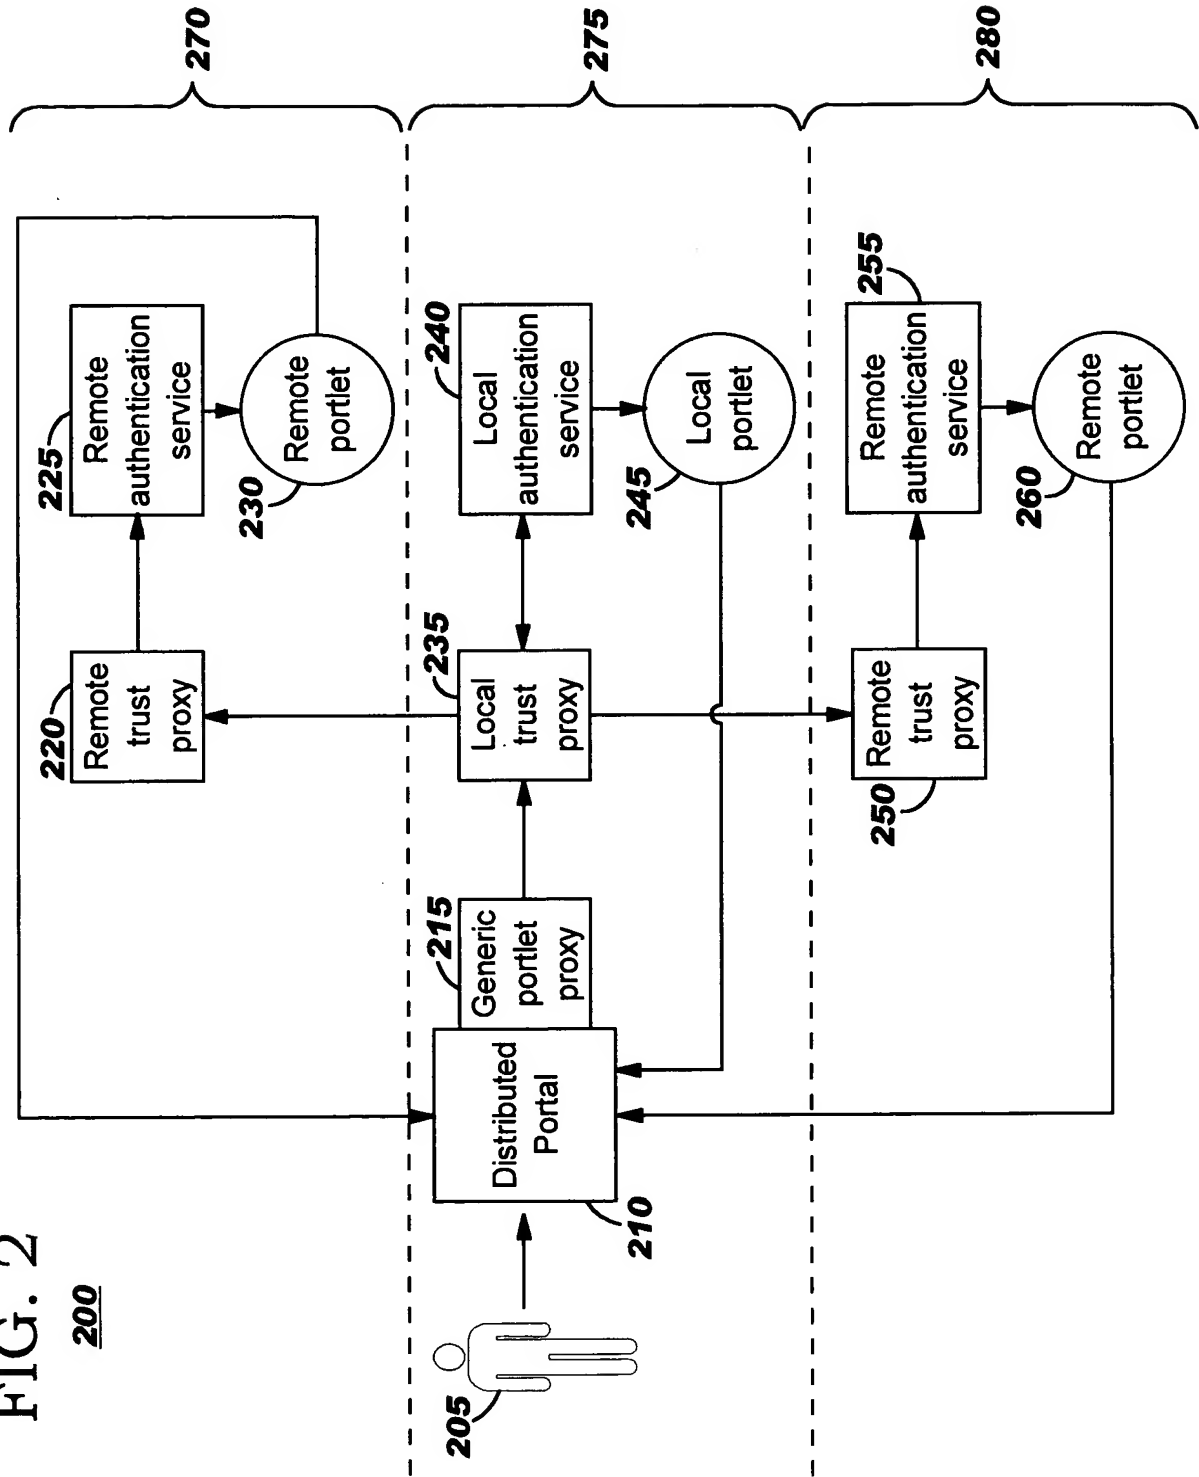


FIG. 3

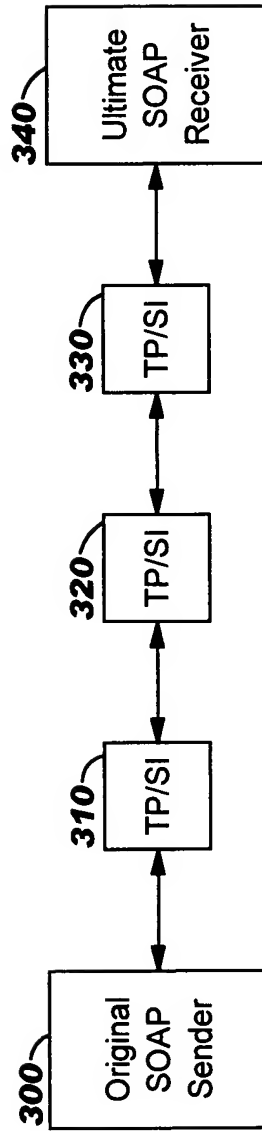


FIG. 4

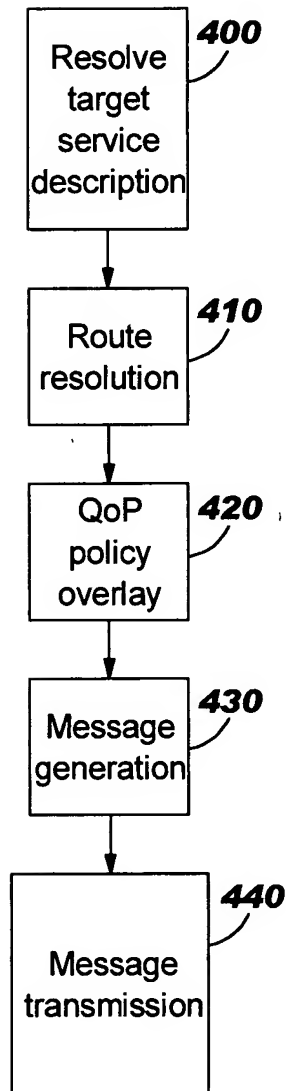


FIG. 5

500

```
<SOAP-ENV:Header>
505— <p:traversalPathRef xmlns:xlink="www.w3.org/1999/xlink"
      xmlns:p="www.ibm.com/p2p/schema/xlink/linkbase"
      xlink:type="simple" xlink:show="new"
510— xlink:href='http://ibm.sampleRoute/linkbase/lb.xml'
      SOAP-ENV:mustUnderstand="1"/>
</SOAP-ENV:Header>
```

FIG. 6

600

```
<SOAP-ENV:Header>
605— <msgType>contentRequest</msgType>
610— <securityHeader>
      <msgReceiver>
615—   <receiverID>1.2.3.4:999</receiverID>
        <receiverTagName>1234Tag</receiverTagName>
      </msgReceiver>
      <msgReceiver>
620—   <receiverRole>remote trust proxy</receiverRole>
        <receiverTagName>RTPTag</receiverTagName>
      </msgReceiver>
      ...
    </securityHeader>
625— <1234Tag>2m3k4k5kak7p0ty3</1234Tag>
630— <RTPTag>aXbYcZ...9q8j7k6w5p</RTPTag>
</SOAP-ENV:Header>
```